


PARALLELOGRAM JOINTER SERIES

- **Parallelogram structure** gives constant distance between Infeed/Outfeed Table and Cutterhead at all positions.
- **Handwheel** mechanism for easy Infeed Table adjustment.
- **Micro adjustment** for accurate Infeed Table height setting.
- **DRO** assures precise depth setting when lowering or raising Infeed Table.
- **Built-in mobile wheels** for easy mobility, yet stable when jointing.
- **Shut off Mechanism** for quick power off.

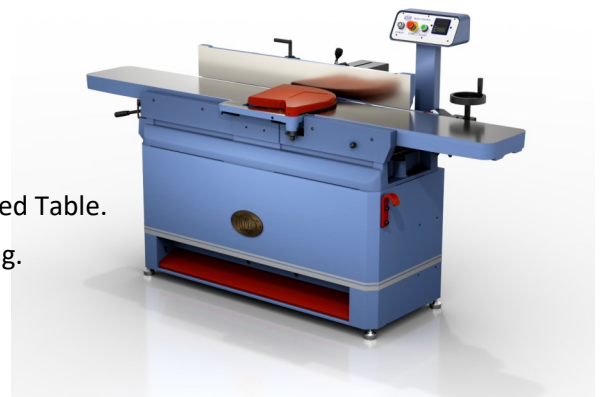

12" PARALLELOGRAM JOINTER

SPECIFICATIONS	
Induction Motor	5HP 230V 1 ϕ
Table Dimensions	12"x88"
Cutterhead	Spiral / 4" DIA
Cutterhead RPM	5,500 (60HZ)
Max. Depth of Cut	1/8"
Max. Rabbeting Capacity	3/4"
Max. Cutting Width	12"
Fence Dimensions	6"x56"
Dust Port	6"
Net Weight	793.7lbs / 360kgs

FEATURES	
Infeed Table Micro Adjustment	✓
Table Height Adjustment	Handwheel Controlled Infeed Table Lever Controlled Outfeed Table
Infeed Table Depth Reading	Digital Readout
Fence Adjustment	Linear Adjustment System
Micro Fence Adjustment	✓
Quick Fence Adjustment Stops	45° / 90° / 135°
Fence Positive Stops	± 45° and 90°
Built-in Mobile Wheels	✓
Shut off Mechanism	✓



PARALLELOGRAM JOINTER SERIES SPECIFICATIONS

	6"	8"	16"
Induction Motor	1HP 115/230V 1 ϕ 60HZ	2HP 230V 1 ϕ 60HZ	7.5HP 230V 3 ϕ
Table Dimensions	6"x60"	8"x72"	16"x100"
Cutterhead	Spiral	Spiral	Spiral / 4" DIA
Cutterhead RPM	5,500 (60HZ)	5,500 (60HZ)	5,500 (60HZ)
Max. Depth of Cut	1/8"	1/8"	1/8"
Max. Rabbeting Capacity	1/2"	1/2"	3/4"
Max. Cutting Width	6"	8"	16"
Fence Dimensions	4"x32"	5"x38"	6"x56.5"
Dust Port	4"	4"	6"
Net Weight	231.5lbs / 105kgs	297.6lbs / 135kgs	1,003lbs / 455kgs

FEATURES

Table Height Adjustment	Lever Control Infeed/Outfeed Table	Lever Control Infeed/Outfeed Table	Handwheel Controlled Infeed Table Lever Controlled Outfeed Table
Infeed Table Micro Adjustment			✓
Infeed Table Depth Reading	Ergonomic Depth Scale Design	Ergonomic Depth Scale Design	Digital Readout
Fence Adjustment		Rack & Pinion	Linear Adjustment System
Micro Fence Adjustment		✓	✓
Quick Fence Adjustment Stops	45° / 90° / 135°	45° / 90° / 135°	45° / 90° / 135°
Fence Positive Stops	± 45° and 90°	± 45° and 90°	± 45° and 90°
Built-in Mobile Wheels	✓	✓	✓
Shut off Mechanism			✓



CHIU TING MACHINERY CO., LTD.
 No.78 Yuang Feng Rd Taiping District Taichung 411032 Taiwan
 FAX: 886-4-22701096 TEL: 886-4-22700258 <http://www.geetech.com.tw>