

15" Benchtop Planer with Minimal Snipe

FEATURES

Overload Switch

Feed Speed Knob

Two feed rate options:
12 FPM for fine finish &
20 FPM for coarse finish.

Elevation DRO with Scale reading function

Set up material removal thickness and measure the thickness of a workpiece.

Patent Pending

Material Removal Gauge

for desired thickness of workpiece to be removed.

Elevation Scale


Table laminated with stainless panel for durable wear and anti-corrosion.

Quick Depth Stop

For finished woodpiece thickness setting:
3/16", 1/4", 1/2", 3/4",



Sheet Metal Extension Wing 12" extended

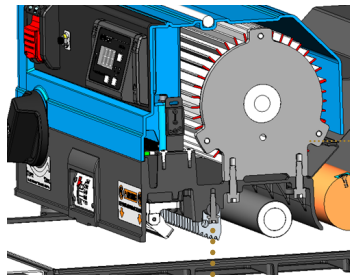

Helical Cutterhead

Durable Carbide Inserts for Helical Cutterhead.
Last up to 30,000 feet of cutting per edge of insert before reversing to other edge.
(Dose not applicable if insert is nicked)

Induction Motor design with Start Capacitor

Low Noise ≤ 80 dB

Wood Return Roller


Roll back roller design to ease pushing workpiece for consecutive cutting operation.

Built-in Anti-Kickback Pawl Mechanism to prevent workpiece from kicking back.

SPECIFICATIONS

Induction Motor	2.5HP 230V 1 ϕ 12AMP
Table Dimensions	15" x 23"
Maximum Depth of Cut	1/8" (≤ 6.5 ") 1/16" (≥ 6.5 ")
Maximum Cutting Height	6"
Maximum Cutting Width	15"
Minimum Stock Thickness	3/16"
Minimum Stock Length	8"
Feed Speed	12 or 20 FPM
Cutterhead Type	Helical 4 rows 40 inserts
Cutterhead Speed	5,600 RPM
Dust Port	4"
Net Weight	150 lbs / 68 kgs

Equipped T Wrench for easy access and rotation Cutterhead when replacing Carbide Inserts.

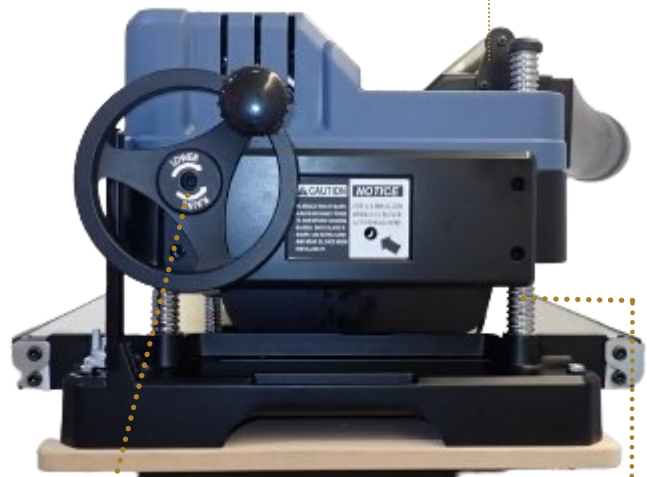

Elevation Handwheel

Handwheel with lock knob design preventing from wheel self rotating.

Almost Zero Snipe !

Elevation Shaft with spring and nut mechanism to remove teeth gap and reduce backlash off set.



CHIU TING MACHINERY CO., LTD.

No.78 Yuang Feng Rd Taiping District Taichung 411032 Taiwan

FAX: 886-4-22701096 TEL: 886-4-22700258 <http://www.geetech.com.tw>